



Cables for Photovoltaics

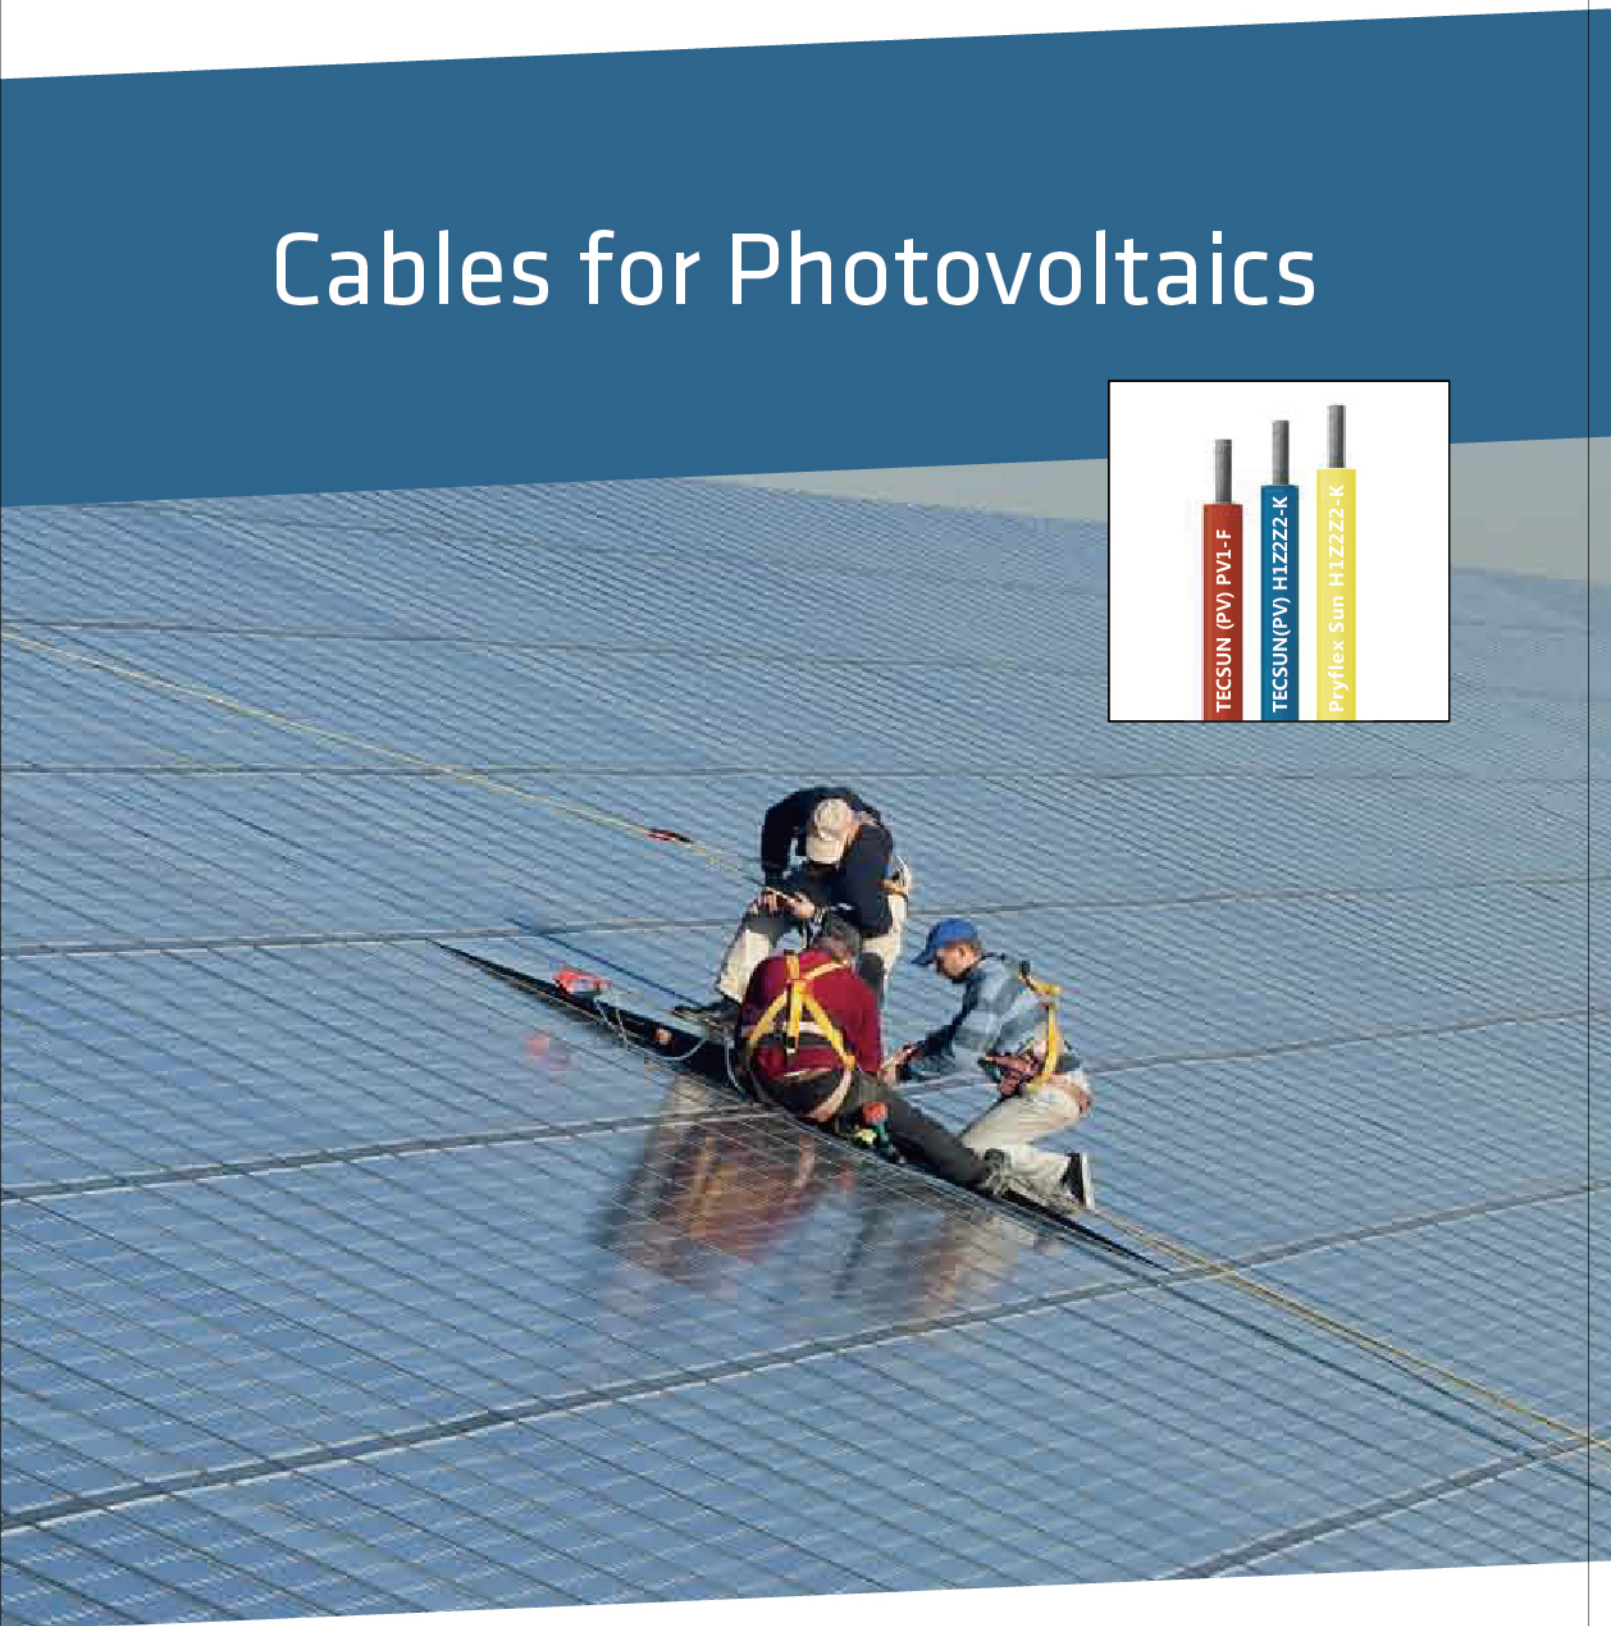



Linking the future

As the worldwide leader in the cable industry, Prysmian Group believes in the effective, efficient and sustainable supply of energy and information as primary driver in the development of communities.

With this in mind, we provide major global organisations in many industries with best-in-class cable solutions, based on state-of-the-art technology.

Through two renowned commercial brands - Prysmian and Draka - based in almost 100 countries, we're constantly close to our customers, enabling them to further develop the world's energy and telecoms infrastructures, and achieve sustainable, profitable growth.

In our energy business, we design, produce, distribute and install cables and systems for the transmission and distribution of power at low, medium, high and extra-high voltage.

In telecoms, the Group is a leading manufacturer of all types of copper and fibre cables, system and accessories - covering voice, video and transmission.

Drawing on over 140 years' experience and continuously investing in R&D, we apply excellence, understanding and integrity to everything we do, meeting and exceeding the precise needs of our customers across all continents, at the same shaping the evolution of our industry.



What links sustainable ideas to real-world results?

Cable solutions to enable the production and supply of renewable energy

To meet an ever-growing need for power, the world is increasingly turning to renewable and sustainably sourced wind and solar energy. In response to this demand, Prysmian cables are helping businesses in the renewable industry around the globe convert these new opportunities into reality.

Our technologies - which cover cables used in wind turbine and tower operations, submarine inter-array, platform connection and export cables to link the various turbines and underground power transmission and distribution cable system for wind

power applications - are at work across the renewables sector, supporting the operations of turbine manufacturers, contractors and developers, grid operators, system integrators and panel makers.

Always aware of our responsibility to the planet, we're constantly driving innovation in our industry, aiming to help renewable industry partners deliver projects with benefits for the future of both our world and their businesses.



TECSUN(PV) H1Z2Z2-K 1/1kV AC (1,5/1,5kV DC)



TECSUN(PV) H1Z2Z2-K 1/1kV AC (1,5/1,5kV DC)

PV cables, rubber insulated, TÜV and VDE certified as per EN 50618



Application

PRYSMIAN Solar cables TECSUN (PV) H1Z2Z2-K acc. to EN 50618, are intended for use in Photovoltaic Power Supply Systems at nominal voltage rate up to 1,5/1,5kV DC.

They are suitable for applications indoor and/or outdoor, in industrial and agriculture fields, in/at equipment with protective insulation (Protecting Class II), in explosion hazard areas (PRYSMIAN Internal Testing). They may be installed fixed, freely suspended or free movable, in cable trays, conduits, on and in walls.

TECSUN(PV) H1Z2Z2-K cables are suitable for direct burial (PRYSMIAN Internal Testing), where the corresponding guidelines for direct burial shall be considered.

Global data

Brand	TECSUN(PV)
Type designation	H1Z2Z2-K
Standard	DIN EN 50618
Certifications / Approvals	TÜV-Certificate nr. 50360241

Design features


Conductor	Electrolytic tinned copper, finely stranded class 5 in accordance with IEC 60228
Insulation	Cross-linked HEPR 120°C
Outer sheath	Cross-linked EVA rubber 120°C. Insulation and sheath are solidly bonded (Two-layer-insulation)
Outer Sheath Colour	Black

Electrical parameters

Rated voltage	DC: 1,5/1,5 kV
Maximum PV-System voltage	AC: 1,0/1,0 kV
Max. permissible operating voltage AC	1.2/1.2 kV
Max. permissible operating voltage DC	1.8/1.8 kV
Test voltage	AC: 6,5 kV / DC: 15 kV (5 Min.)
Current Carrying Capacity description	According to EN 50618, Table A-3
Electrical Tests	Acc. to EN 50618, Table 2: • Conductor Resistance; • Voltage Test on completed cable (AC and DC); • Spark Test on insulation; Insulation Resistance (at 20°C and 90°C in water); • Insulation Long-Term Resistance to DC (10 days, in 85°C water, 1,8 kV DC); • Surface Resistance of Sheath. PRYSMIAN internal test: • Dielectric Strength; • Insulation Resistance at 120°C in air.

TECSUN(PV) H1Z2Z2-K 1/1kV AC (1,5/1,5kV DC)

PV cables, rubber insulated, TÜV and VDE certified as per EN 50618

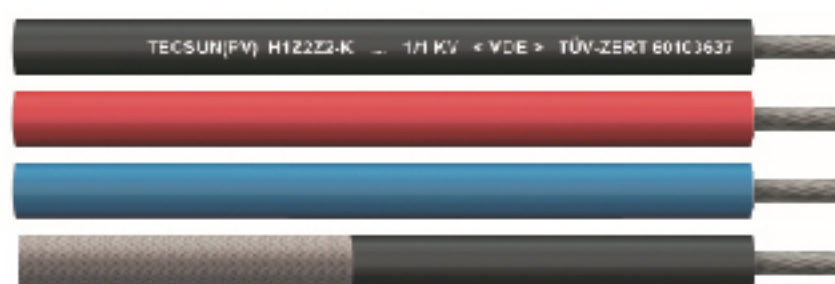

Chemical parameters

Reaction to fire	Acc. to EN 50618, Table 2: • Single Cable Flame Test per EN 60332-1-2; • Low Smoke Emission per EN 61034-2 (Light Transmittance > 70%); • Halogen-free per EN 50525-1, Annex B. PRYSMIAN internal test: • Multiple Cable Flame Test per EN 50305-9; • Low Toxicity per EN 50305 (ITC < 3).
Resistance to oil	PRYSMIAN internal test, on sheath: • 24h, 100°C (meets VDE 0473-811-404, EN 60811-404).
Weather resistance	Acc. to EN 50618, Annex E and Table 2: • UV Resistance on sheath: tensile strength and elongation at break after 720h (360 Cycles) of exposure to UV lights acc. to EN 50289-4-17, Method A; • Ozone resistance: per Test Type B (DIN EN 50396). PRYSMIAN internal test: • Water Absorption (Gravimetric) per DIN EN 60811-402.
Acid and alkaline resistance	Acc. to EN 50618, Annex B: • 7 days, 23°C (N-Oxalic Acid, N-Sodium Hydroxide) acc. to EN 60811-404.
Ammonia Resistance	PRYSMIAN Internal Testing: • 30 days in Saturated Ammonia Atmosphere.
Environmentally Friendly	TECSUN(PV) cables comply with the RoHS directive 2011/65/EU of the European Union.

Thermal parameters

Max. operating temperature of the conductor	Max. 90°C at conductor (lifetime acc. to Arrhenius-Diagram TECSUN = 30 years). 20.000 hours of operation at conductor temperature of 120°C (and 90°C ambient temperature) are permitted.
Max. short circuit temperature of the conductor	250 °C (5 s.)
Ambient temperature (for fixed and flexible installation)	Installation and handling: -25°C up to 60°C In operation: -40°C up to +90°C
Resistance to cold	Acc. to EN 50618, Table 2: • Cold Bending Test at -40°C acc. to DIN EN 60811-504; • Cold Elongation Test at -40°C acc. to DIN EN 60811-505; • Cold Impact Test at -40°C acc. to DIN EN 60811-506 and EN 50618 Annex C.
Damp-Heat Test	Acc. to EN 50618, Table 2: • 1.000h at 90°C and 85% humidity (test acc. to EN 60068-2-78).

Mechanical parameters

Max. tensile load	15 N/mm ² in operation, 50 N/mm ² during installation
Min. bending radius	Acc. to EN 50565-1
Abrasion resistance	PRYSMIAN Internal Testing: • Acc. to DIN ISO 4649 against abrasive paper; • Sheath against sheath; • Sheath against metal; • Sheath against plastics.
Shrinkage Test	Acc. to EN 50618, Table 2: • Maximum Shrinkage <2% (test acc. to EN 60811-503).
Pressure Test at High Temperature	PRYSMIAN Internal Testing: • <50% acc. to EN 60811-508.
Dynamic Penetration Test	Acc. to EN 50618, Annex D: • Meets requirements of EN 50618.
Shore-Hardness	PRYSMIAN Internal Testing: • Type A: 85 acc. to DIN EN ISO 868
Durability of Print	Acc. to EN 50618: • Test acc. to EN 50396.
Rodent resistance	Safety can be optimized by utilizing protective hoses, or protective element, such as a metallic screen braid.

Datasheet 电缆参数

Number of cores x cross section	Colour	Conductor diameter max. mm	Outer diameter min. mm	Outer diameter max. mm	Bending radius fixed min. mm	Weight (approx.) kg/km	Permissible tensile force max. N	Conductor resistance at 20°C max. Ω/km	Current carrying capacity for single cable free in air (60°C ambient temp.) A	Current carrying capacity for single cable on a surface (60°C ambient temp.) A	Short Circuit Current (1s. from 90°C to 250°C) kA
1x1,5	black	1.6	4.4	5.2	15	35	23	13.7	30	29	0.21
1x2,5	black	1.9	4.9	5.7	17	46	38	8.21	41	39	0.36
1x4	black	2.4	5.4	6.2	18	61	60	5.09	55	52	0.57
1x6	black	2.9	5.9	6.7	20	80	90	3.39	70	67	0.86
1x10	black	4	7.1	7.8	23	122	150	1.95	98	93	1.43
1x16	black	5.6	9	9.8	30	200	240	1.24	132	125	2.29
1x25	black	6.4	10.4	11.5	34	290	375	0.795	176	167	3.58
1x35	black	7.5	11.7	12.8	50	400	525	0.565	218	207	5.01
1x50	black	9	13.5	14.5	58	560	750	0.393	276	262	7.15
1x70	black	10.8	15.5	16.5	66	750	1050	0.277	347	330	10.01
1x95	black	12.6	17.7	18.7	75	970	1425	0.21	416	395	13.59
1x120	black	14.2	19.2	20.4	82	1220	1800	0.164	488	464	17.16
1x150	black	15.8	21.4	22.6	91	1500	2250	0.132	566	538	21.45
1x185	black	17.4	23.7	25.1	101	1840	2775	0.108	644	612	26.46
1x240	black	20.4	27.1	28.5	114	2400	3600	0.082	775	736	34.32

PRYSUN H1Z2Z2-K 1/1kV AC (1.5/1.5kV DC)



PRYSUN H1Z2Z2-K 1/1kV AC (1.5/1.5kV DC) PV cables, elastomer insulated Per EN50618



Application

Designed and tested acc. to EN50618:2014, PRYSMIAN Solar cables PRYSUN H1Z2Z2-K are intended for use in Photovoltaic Power Supply Systems: Indoor and/or outdoor, in industrial and agriculture fields. They are suitable for applications in/at equipment with protective insulation (Protecting Class II), and may be installed as fixed or freely suspended or free movable. Installation in cable trays, conduits, on and in walls is permissible.

Global data

Brand	PRYSUN
Type designation	H1Z2Z2-K
Standard	Refer to EN50618:2014

Design features

Conductor	Class 5 Tinned copper conductor
Insulation	Halogen free cross-linked elastomer Natural color - white or Red
Outer sheath	Halogen free cross-linked elastomer
Outer Sheath Colour	Black or Red

Electrical parameters

Rated voltage	DC: 1,5/1,5 kV
Maximum PV-System voltage	AC: 1,0/1,0 kV
Max. permissible operating voltage AC	1.2/1.2 kV
Max. permissible operating voltage DC	1.8/1.8 kV
Test voltage	AC: 6,5 kV / DC: 15 kV (5 Min.)
Current Carrying Capacity description	According to EN 50618, Table A-3
Electrical Tests	Acc. to EN 50618, Table 2: • Conductor Resistance; • Voltage Test on completed cable (AC and DC); • Spark Test on insulation; Insulation Resistance (at 20°C and 90°C in water); • Insulation Long-Term Resistance to DC (10 days, in 85°C water, 1,8 kV DC); • Surface Resistance of Sheath.

PRYSUN H1Z2Z2-K 1/1kV AC (1.5/1.5kV DC) PV cables, elastomer insulated Per EN50618



Chemical parameters

Reaction to fire	Acc. to EN 50618, Table 2: • Single Cable Flame Test per EN 60332-1-2; • Low Smoke Emission per EN 61034-2 (Light Transmittance > 70%); • Halogen-free per EN 50525-1, Annex B.
Weather resistance	Acc. to EN 50618, Annex E and Table 2: • UV Resistance on sheath: tensile strength and elongation at break after 720h (360 Cycles) of exposure to UV lights acc. to EN 50289-4-17, Method A; • Ozone resistance: per Test Type B (EN 50396).
Acid and alkaline resistance	Acc. to EN 50618, Annex B: • 7 days, 23°C (N-Oxalic Acid, N-Sodium Hydroxide) acc. to EN 60811-404.

Thermal parameters

Max. operating temperature of the conductor	Max. 90°C at conductor. 20.000 hours of operation at conductor temperature of 120°C (and 90°C ambient temperature) are permitted.
Max. short circuit temperature of the conductor	250 °C (5 s.)
Ambient temperature (for fixed and flexible installation)	Installation and handling: -25°C up to 60°C In operation: -40°C up to +90°C
Resistance to cold	Acc. to EN 50618, Table 2: • Cold Bending Test at -40°C acc. to DIN EN 60811-504; • Cold Elongation Test at -40°C acc. to DIN EN 60811-505; • Cold Impact Test at -40°C acc. to DIN EN 60811-506 and EN 50618 Annex C.
Damp-Heat Test	Acc. to EN 50618, Table 2: • 1.000h at 90°C and 85% humidity (test acc. to EN 60068-2-78).

Mechanical parameters

Max. tensile load	15 N/mm ² in operation, 50 N/mm ² during installation
Min. bending radius	Acc. to EN 50565-1
Shrinkage Test	Acc. to EN 50618, Table 2: • Maximum Shrinkage <2% (test acc. to EN 60811-503).
Dynamic Penetration Test	Acc. to EN 50618, Annex D: • Meets requirements of EN 50618.
Durability of Print	Acc. to EN 50618: • Test acc. to EN 50396.

Datasheet 电缆参数

Number of cores x cross section	Colour	Conductor diameter max. mm	Outer diameter min. mm	Outer diameter max. mm	Bending radius fixed min. mm	Weight (approx.) kg/km	Permissible tensile force max. N	Conductor resistance at 20°C max. Ω/km	Current carrying capacity for single cable free in air (60°C ambient temp.) A	Current carrying capacity for single cable on a surface (60°C ambient temp.) A	Short Circuit Current (1s. from 90°C to 250°C) kA
1x1,5	black	1.6	4.4	5.2	15	35	23	13.7	30	29	0.21
1x2,5	black	1.9	4.9	5.7	17	47	38	8.21	41	39	0.36
1x4	black	2.4	5.4	6.2	18	61	60	5.09	55	52	0.57
1x6	black	2.9	5.9	6.4	20	81	90	3.39	70	67	0.86
1x10	black	4	7.1	7.8	23	124	150	1.95	98	93	1.43
1x16	black	5.6	9	9.8	30	190	240	1.24	132	125	2.29
1x25	black	6.4	10.4	11.5	34	285	375	0.795	176	167	3.58
1x35	black	7.5	11.7	12.8	50	380	525	0.565	218	207	5.01
1x50	black	9	13.5	14.5	58	535	750	0.393	276	262	7.15
1x70	black	10.8	15.5	16.5	66	745	1050	0.277	347	330	10.01
1x95	black	12.6	17.7	18.7	75	965	1425	0.21	416	395	13.59
1x120	black	14.2	19.2	20.4	82	1211	1800	0.164	488	464	17.16
1x150	black	15.8	21.4	22.6	91	1481	2250	0.132	566	538	21.45
1x185	black	17.4	23.7	25.1	101	1822	2775	0.108	644	612	26.46
1x240	black	20.4	27.1	28.5	114	2353	3600	0.082	775	736	34.32

苏州特雷卡电缆有限公司
地址：苏州市相城经济开发区康元路88号
邮编215131
电话：+86 512 6578 9888
传真：+86 512 6578 9858

Suzhou Draka Cable Co., Ltd.
Add: No. 88 Kangyuan Road, Xiangcheng Economic
Development District, Suzhou, 215131
T: +86 512 6578 9888
F: +86 512 6578 9858

Prysmian
Group

普睿司曼（天津）电缆有限公司
地址：天津市西青经济开发区大寺工业园津荣道16号
邮编300385
电话：+86 22 2753 9605
传真：+86 22 8398 0773

Prysmian Tianjin Cables Co., Ltd.
Add: 16, Jin Rong Road, Dasi Town, Xiqing
District, Tianjin, P. R. China 300385
T: +86 22 2753 9605
F: +86 22 8398 0773

